

PROJECT: \_\_\_\_\_  
 CATALOG #: \_\_\_\_\_  
 FIXTURE TYPE: \_\_\_\_\_  
 NOTES: \_\_\_\_\_

# TD Recessed Troffer Gen 2



TD 22



The *TD Recessed Troffer* comes in 2' x 2' static troffer for inverted t-grid ceilings with standard earthquake clips. This high-performing luminaire with advanced light distribution delivers unprecedented energy savings ideal for schools, hospitals, office spaces, etc.

### APPLICATIONS

Commercial and Retail spaces, etc.

### REPLACEMENT

2 Lamp T8 U6 32W

### OPTIONS



EL UNV-8W

## PERFORMANCE INFORMATION

| SIZE    | SERIES NUMBER   | WATT | LUMENS | CCT   |
|---------|-----------------|------|--------|-------|
| 2' x 2' | TD 22 32 G2 35K | 26W  | 3,074  | 3500K |

| ORDERING GUIDE                  |                       |                        |            |                           |                  |                        | EXAMPLE: TD 22 32 G2 35K  |
|---------------------------------|-----------------------|------------------------|------------|---------------------------|------------------|------------------------|---|
| Luminaire Type                  | Size                  | Lumen Output           | Generation | Voltage                   | CCT              | Finish                 | Options   |
| <b>TD</b><br>Troffer<br>Fixture | <b>22=</b><br>2' x 2' | <b>32</b> 3,074 Lumens | <b>G2</b>  | <b>BLANK=</b><br>120-277V | <b>35K</b> 3500K | <b>BLANK=</b><br>White | <b>BLANK=</b> No Option<br><b>EL UNV-8W=</b> Emergency Backup Kit |

Due to continuous product improvements, specification and/or equipment updates may change without notice.

## SPECIFICATIONS

### HOUSING

Cold-rolled steel, fabricated and welded for seamless appearance

### AMBIENT TEMPERATURE

Suitable for use in -20°C to 50°C (-4°F to 122°F)

### MOUNTING

Recessed Mounting and Surface Mounting available. Surface Mounting Kit sold separately.

### EFFICACY

Up to 137 lumen's per watt (see individual wattage data)

### CCT AND CRI

3500K CCT available; 80+ CRI

### LENS

Frosted extruded acrylic lens for maximum source obscuration and visual comfort. High reflectance white reflector surfaces.

### WARRANTY

5-year limited warranty. Comprehensive warranty terms can be located on [www.slgus.com](http://www.slgus.com).

### ELECTRICAL

High quality constant-current drivers rated for 50/60Hz operation, 120-277V input. Dimmable LED system using 0-10V dimmer signals.

### ENERGY DATA

Power factor above 90%.


### FINISH

Polyester Powder White finish. Multi-stage process produces 3 mil thickness for superior corrosion resistance and maximum durability.

### CERTIFICATIONS

UL Listed for damp and dry locations. FCC compliant. RoHs compliant. Design Lights Consortium® (DLC) Premium 5.0 qualified product. Not all versions of this product may be DLC qualified. Please visit [www.slgus.com](http://www.slgus.com) to confirm which versions may be qualified.


## DIMENSIONS

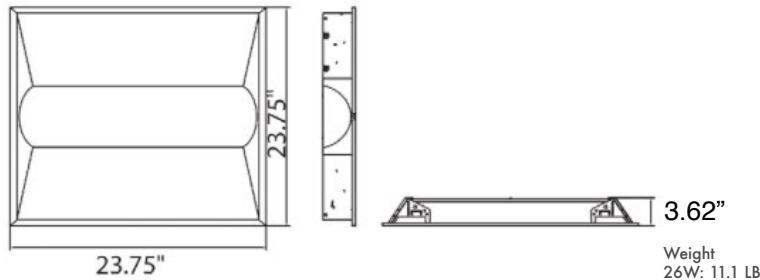

TD 2' x 2'

Due to continuous product improvements, specification and/or equipment updates may change without notice.

### PHOTOMETRIC

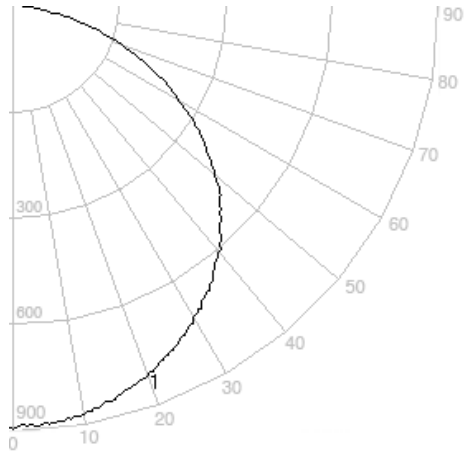


TD 22 32 G2 35K

### ELECTRICAL LOAD

| Series Number   | Wattage | Current (A) |      |      |      |
|-----------------|---------|-------------|------|------|------|
|                 |         | 120V        | 208V | 240V | 277V |
| TD 22 32 G2 35K | 26W     | 0.22        | 0.13 | 0.11 | 0.09 |

### PERFORMANCE COMPARISON

| Product Series | Wattage | Lumens   | Efficacy (LPW) | Replaces         | Voltage  | Max Mounting Height | DLC   |
|----------------|---------|----------|----------------|------------------|----------|---------------------|---|
| TD 22 32       | 26W     | 3,074 Lm | 126 Lm/W       | 2 Lamp T8 U6 32W | 120-277V | 8-12 ft             |  |

Due to continuous product improvements, specification and/or equipment updates may change without notice.