

PROJECT: _____
 CATALOG #: _____
 FIXTURE TYPE: _____
 NOTES: _____

WF Full Cutoff Wall Pack Series Gen 1



WFL

The versatile luminaire *WF Full Cutoff Wall Pack Series Gen 1* provides excellent uniformity and full cutoff light distribution and is available in large for varied mounting heights. This can be used in a variety of Commercial, Industrial, and Security applications.

APPLICATIONS

Security Lighting, Perimeter Lighting, Building Entrances, Walkways, etc.

REPLACEMENT

175W - 400W MH

OPTIONS



MS-FSP-212



L3/L7



PC UNV B3



EL UNV-8W



PERFORMANCE INFORMATION

SERIES NUMBER	MOUNTING HEIGHT	WATT	LUMENS	CCT
WFL 95 G1 5K	15-30 ft	90W	9,500	5000K
WFL 140 G1 5K	15-30 ft	135W	14,000	5000K

ORDERING GUIDE

EXAMPLE: WFL 95 G1 5K

Luminaire Type	Lumen Output	Generation	Voltage	CCT	Finish	Options
WFL Full Cutoff Wall Pack Large	95 9,500 Lumens 140 14,000 Lumens	G1	BLANK= 120-277V	4K 4000K 5K 5000K	BLANK= Dark Bronze W=White*	BLANK= No Option MS-FSP-212= Motion Sensor (Choose 1) L3= 40' diameter lens L7= 100' diameter lens PC UNV B3= Button Photocell EL UNV-8W= Emergency Backup Kit

*For a custom color, please call to place your order

Due to continuous product improvements, specification and/or equipment updates may change without notice.

SPECIFICATIONS

HOUSING

Sealed die-casting aluminum casing thermally conducts heat from LEDs for optimal performance and long life.

AMBIENT TEMPERATURE

Suitable for use in -40°C to 50°C (-40°F to 122°F)

MOUNTING

Die-cast back box with four (4) conduit entry points and knockout pattern for junction box or direct wall mounting. Hinged housing and bubble level included for easy installation.

EFFICACY

Up to 109 lumens per watt (see individual wattage data)

CCT AND CRI

4000K and 5000K CCT available; 80+CRI

OPTICS

Tempered UV coated flat lens provide outstanding performance, uniformity, and glare control.

WARRANTY

10-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

ELECTRICAL

Standard voltage 120-277V, 50/60Hz input.

FINISH

Polyester Powder Dark Bronze finish. Please call for custom color order.

CERTIFICATIONS

UL Listed for wet locations. Equivalent to IP65 rating. FCC compliant. RoHs compliant. NSF compliant. Design Lights Consortium® (DLC) Premium and Standard qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.slgus.com/DLC to confirm which versions are qualified.

OPTIONS



MS-FSP-212
Dimmable Motion Sensor



MS-FSP-L3/L7
Lens

The **MS-FSP-212** provides multi-level control base on motion and daylight level. Requires L3 or L7 lens depending the mounting height.

Operation Voltage	Shape	Adjustable Time Delay	Fade Down Time	Operating Temperature	Mounting Height For MS-FSP-L3	Mounting Height For MS-FSP-L7
120/277V	Cone	30 sec - 30 min	0-10 sec	-40°F to 158°F	20 ft*	40 ft**

* Covers a 40 ft diameter when mounting height is 20 ft. Coverage is equal to 2x the height.

** Covers a 100 ft diameter when mounting height is 40 ft. Coverage is equal to 2.5x the height



Due to continuous product improvements, specification and/or equipment updates may change without notice.

DIMENSIONS

WFL



Approximate Luminaire Weight: 8 lbs.

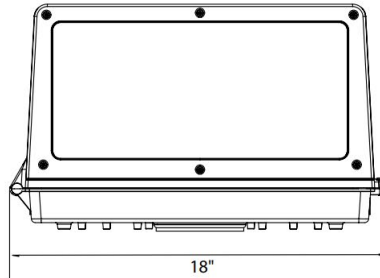

ELECTRICAL LOAD

Series Number	Wattage	Current (A)			
		120V	208V	240V	277V
WFL 95 G1 5K	90W	0.75	0.43	0.38	0.32
WFL 140 G1 5K	135W	1.13	0.65	0.57	0.49

Due to continuous product improvements, specification and/or equipment updates may change without notice.